








-  Aqua2use water
-  Greywater
-  Sewerwater
-  Ventilation




unit : mm

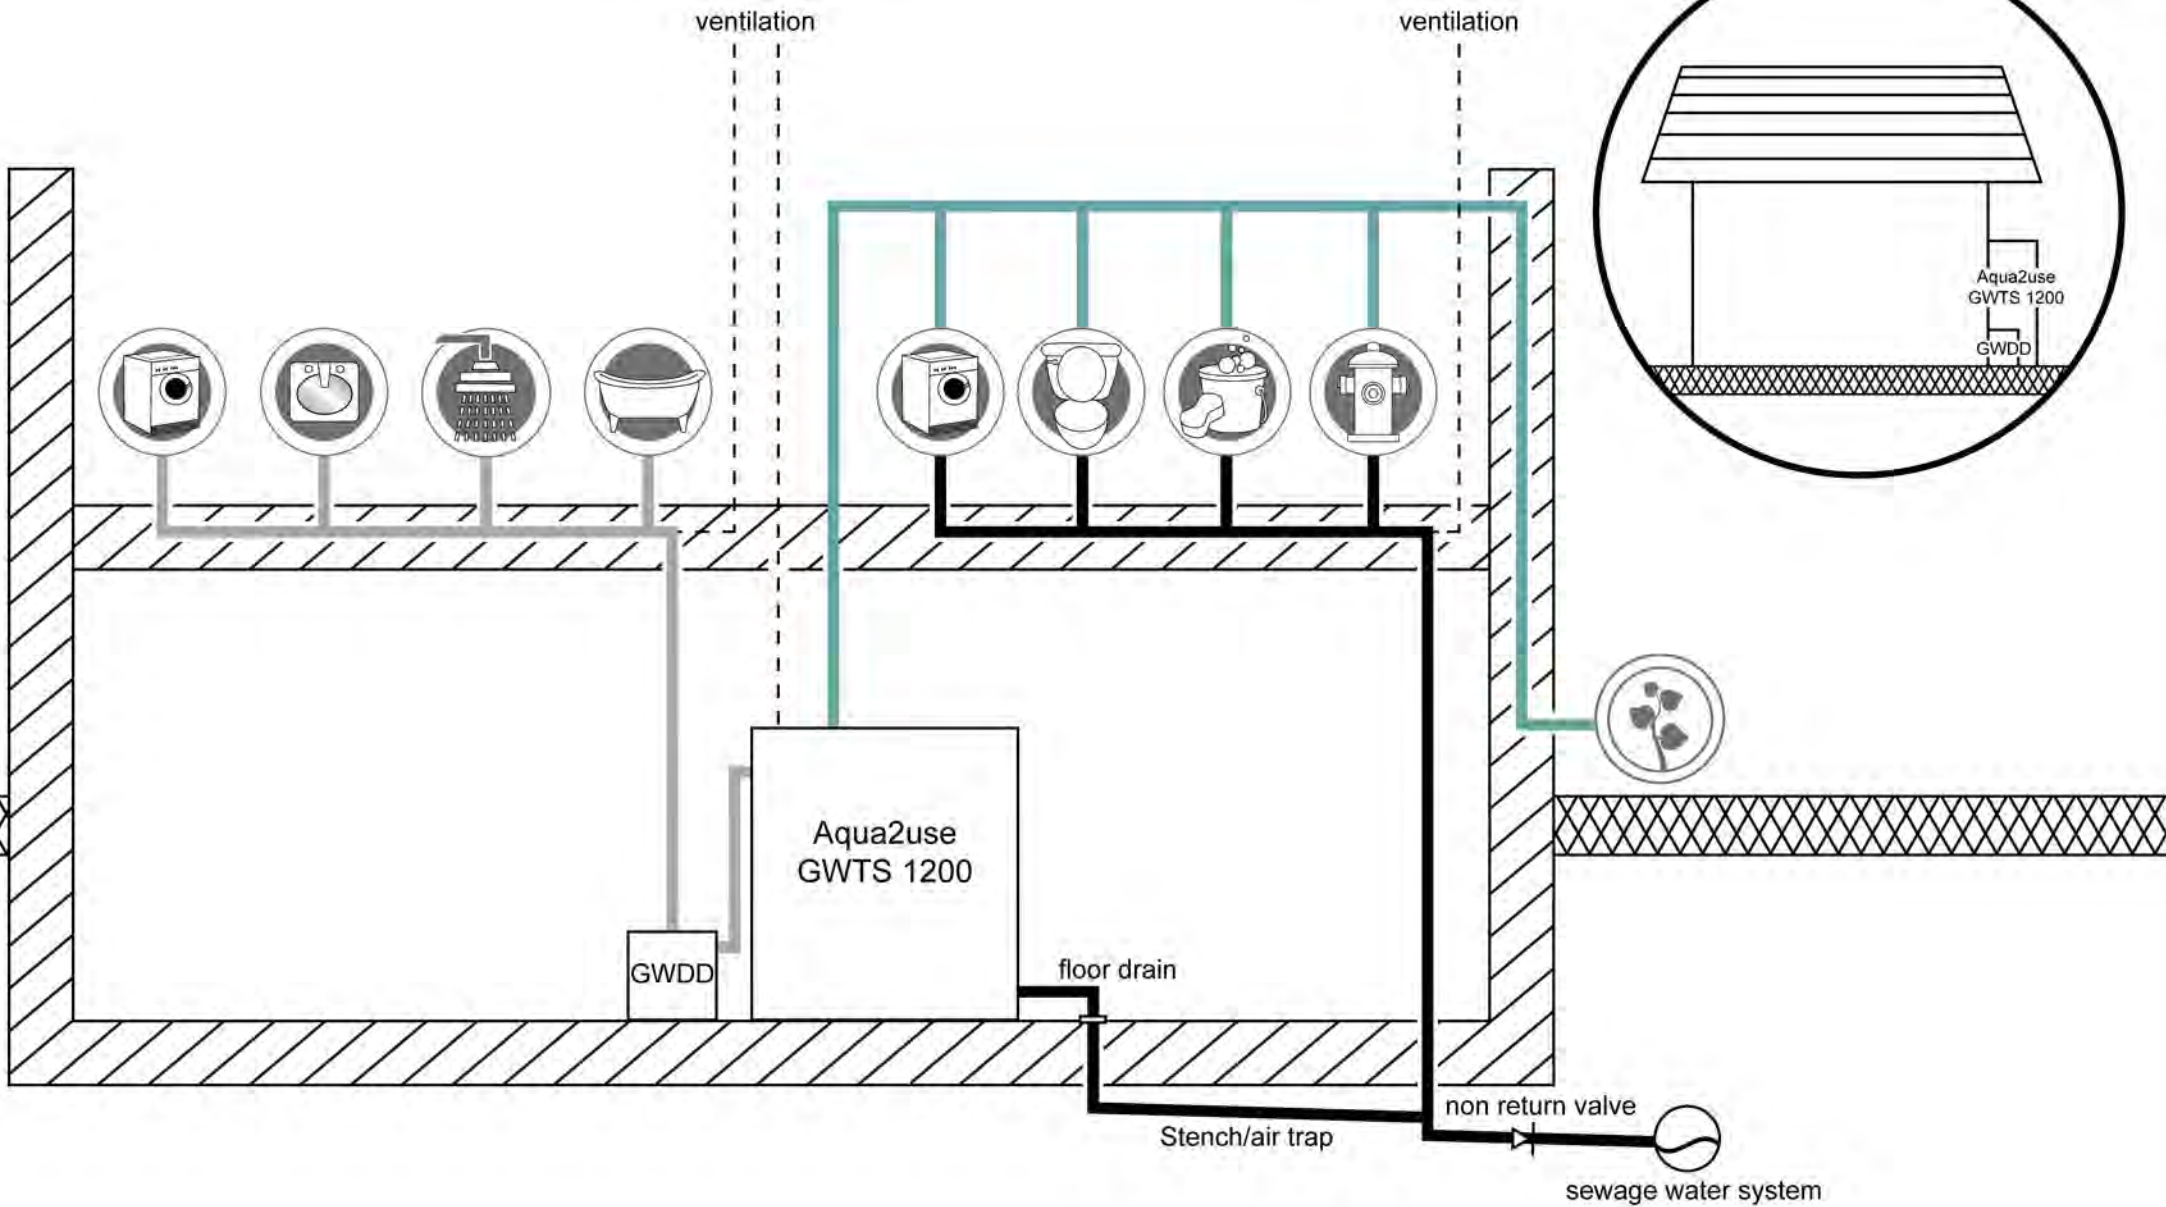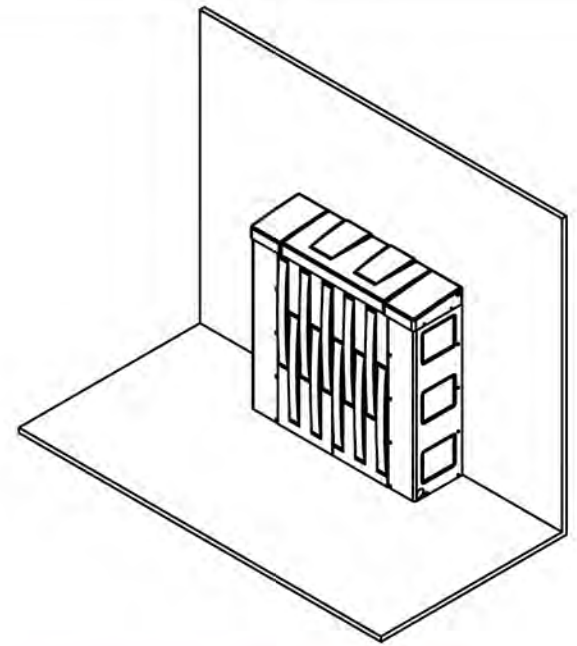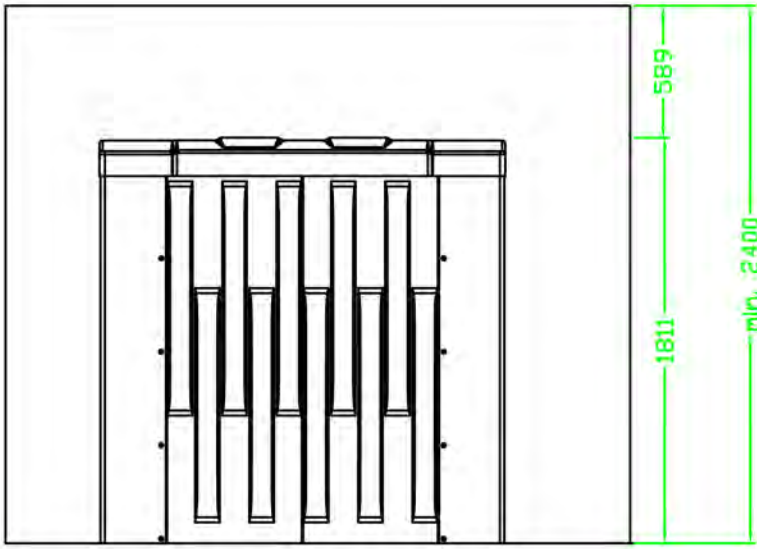

②

①

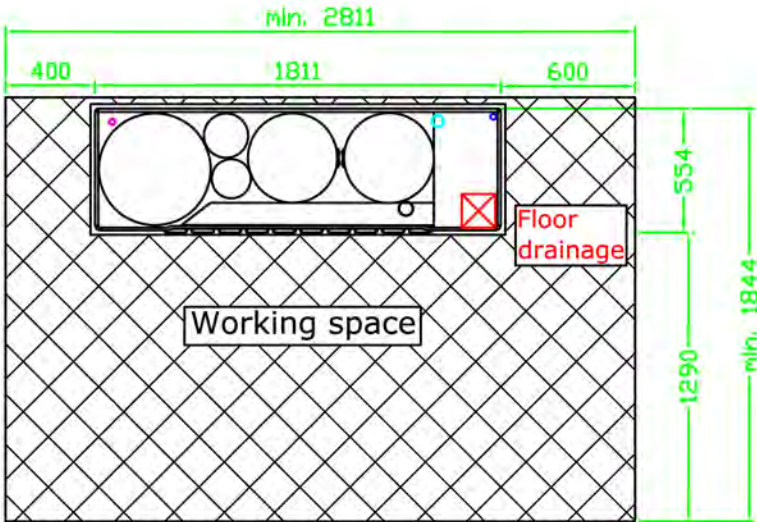

① Aqua2use GWDD prefilter	
1 Greywater inlet	2" connection
2 Prefilter	Aqua2use GWDD, unit can be installed above or semi-underground
3 Pump cable connection	Pump supplied with 6 m cable To be provided by customer: power outlet AC: 230V/50Hz 1.4Amp., 270W
② Aqua2use GWTS1200	
4 Prefiltered greywater inlet	1" connection from Aqua2use GWDD
5 Treated water outlet	2" Pipe
6 Air vent outlet	1" Pipe
7 Floor drainage	3" pipe to be provided by customer.
8 Control cabin	cable connection : 1000mm To be provided by customer: power outlet AC: 230V/50Hz 5Amp
9 Floor drainage	for 3" outlet provided by customer

3		Aqua2use GWTS 1200	DRAWN	BN	CHECK	AMOUNT		A50-C
2		Installation Space Requirement	DATE		DATE	MATERIAL		TITLE
1		01/05/2011				HARDNESS		
DATE	DRAWN	DESCRIPTION	Matala Water Tech.			UNIT	MM	SCALE

